





Warning

- To be used for Baseball protection only
- Not a toy, do not climb on net
- Must be used with adult supervision
- Must be either Staked or Weighted down using BowBags (not supplied)

Assembly Instructions for BOWNET 'L' Screen

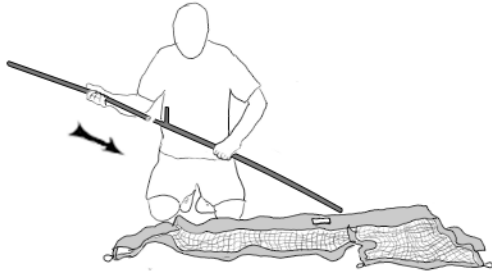


1. Lay the net out, with the slot opening in the long pocket up.
2. Then join frame pieces together


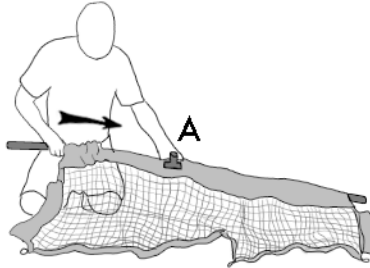


Note: Opening in pocket is not centered, align frame to match


3. Slide the frame into the pocket passing pipe thru opening (A)




4. Clip legs on ends of frame

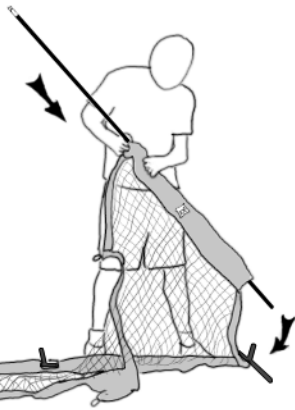


5. Join the thicker rods together (B) Then slide one rod down the long side sleeve, placing end into pipe

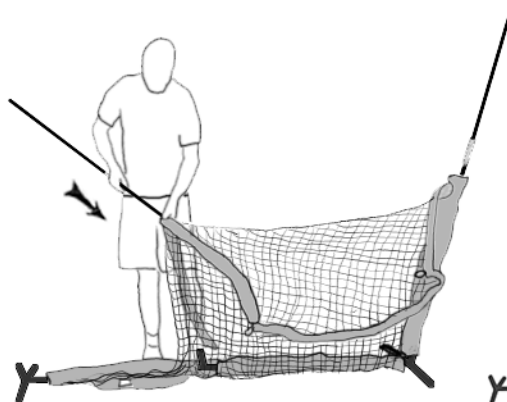


6. Take the other long rod and slide it **UP** the center sleeve. Then place the rod end into pipe

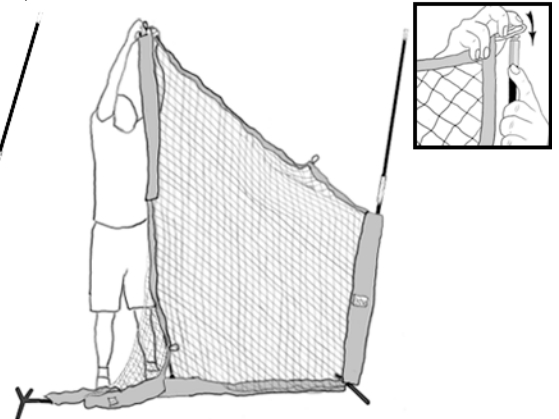


7. Slip loop over the rod top, repeat on other pole by pulling orange sleeve up and loop cord over pole

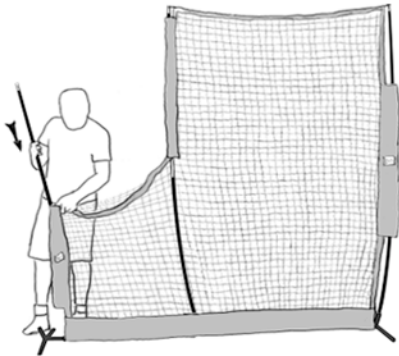

8. Take the last thinner rod and slide it down the short side sleeve placing the rod end into the pipe

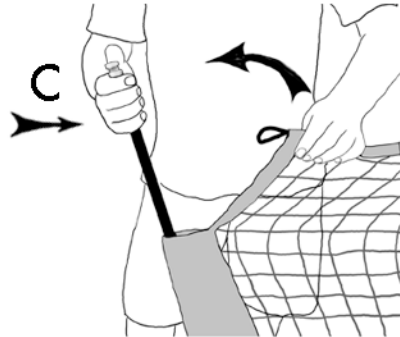

9. Grip Rod pushing direction (C) whilst pulling Orange sleeve up and looping Cord over Pole Top

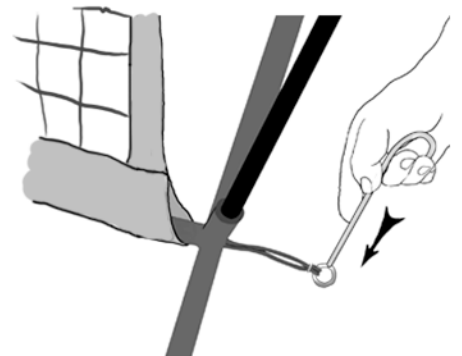

10. Stake thru ring into ground applying a little tension to bungee. Repeat on other side

1 year limited Manufactures Warranty on Manufacturing defects only. 30 day money back guarantee. For a full description of Warranty-Guarantee-Terms & Conditions. See www.thebownet.com

Triad Sports Group LLC. 1693 Ramona Drive Suite 1
Thousand Oaks, Ca 91320 866.950.NETS